


# Earthing Sets ES

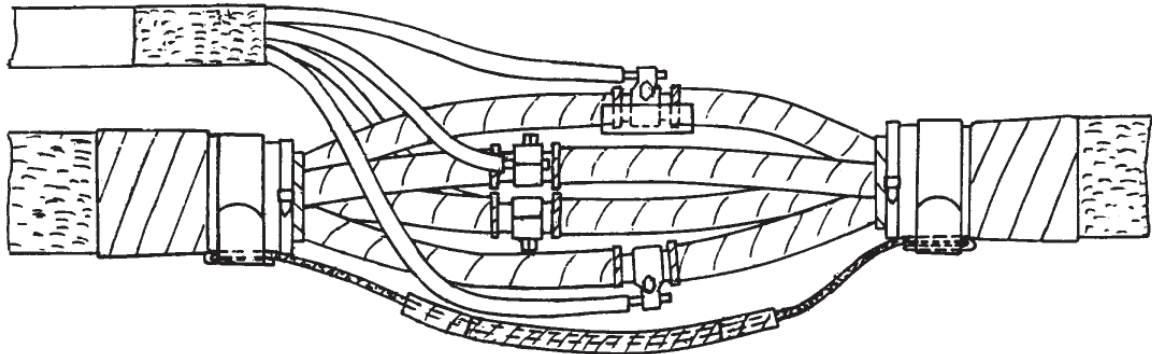

Type	Belted Cable with Lead Sheath	Dimensions of the Earthing Braid
earthing set ES 1	N(A)KBA 4 x 10 bis 4 x 50 mm <sup>2</sup>	16 mm <sup>2</sup>
earthing set ES 2	N(A)KBA 4 x 35 bis 4 x 70 mm <sup>2</sup>	16 mm <sup>2</sup>
earthing set ES 3	N(A)KBA 4 x 50 bis 4 x 150 mm <sup>2</sup>	16 mm <sup>2</sup>
earthing set ES 4	N(A)KBA 4 x 185 bis 4 x 240 mm <sup>2</sup>	35 mm <sup>2</sup>

## Handling

By few and simple steps a fast, operator-safe and solder-free re-establishment of the lead sheath connection is ensured.

The lead sheath will be connected by earthing braid and a rolled spring.

The self-amalgamating insulation tape is wrapped in two layers around the lead jacket and guarantees a save longitudinal water tightness.

## Application

The earthing sets are suitable for 4-core belted cable with lead sheath (N(A)KBA).

They are suitable for the use in the different cast resin joints.

## Specification

- flexible earthing braid
- roll springs
- self-amalgamating insulation tape
- binding wire
- cable ties
- Cleaning cloth
- abrasive tape
- processing instruction