


1 kV Straight Joint M



resin technique

Type M

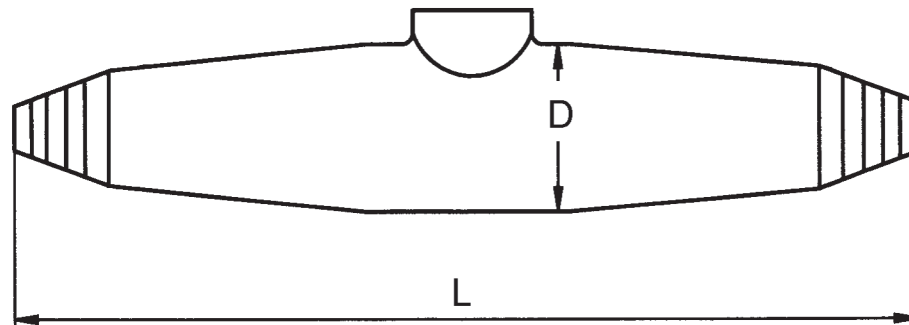

Type	Length L	Diameter D	Suitable for Cables	
	mm	mm	Diameter mm	Cross Section mm ² *
MX 1	185	24	6 - 15	1,5 - 4
MT 1	240	40	8 - 25	4 - 10
MT 2	273	44	16 - 32	10 - 25
MT 3	355	70	24 - 45	25 - 50
MT 4	436	86	28 - 56	50 - 95
MT 5	550	110	37 - 68	70 - 150
MT 6	810	135	50 - 88	120 - 300

* data for 4-core cable N(A)YY and standard connectors.

Handling

By few and simple handles a fast and operatorsafe assembly of the housing is ensured.

Application

The joint box is suitable for use with standard connectors.

Quality

Our casting resins fulfill the requirements of VDE 0291 part of 2 respectively hp 631.1.

By application of the quality management system in accordance with DIN EN ISO 9001:2000 the quality of our products is guaranteed.

Specification

- two-part, transparent shell
- PUR and hardener in tins or alternatively in double-chamber bags
- insulating tape
- stirring spatula (for tins)
- protection gloves
- installation instructions