


# 1 kV Straight Joint vm



resin technique

VM 650

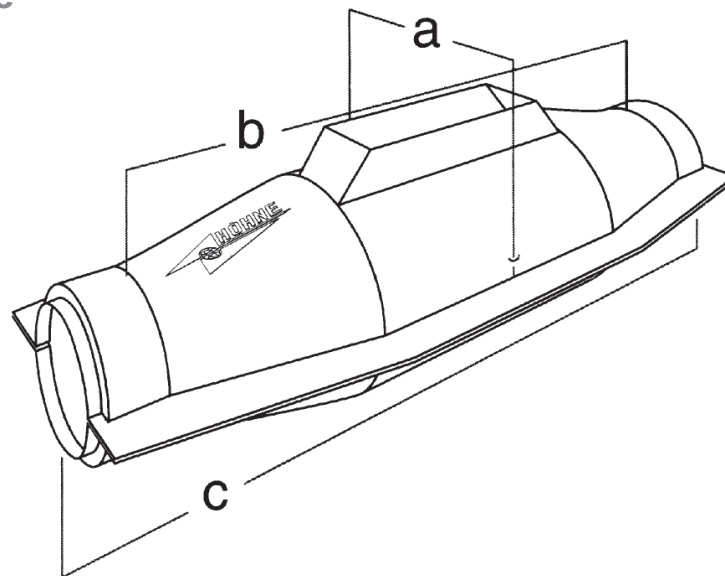

Main Cable according to DIN/TGL	
Type	Cross Section (mm <sup>2</sup> )
N(A)YY, N(A)Y2Y, NA2XY, NA2X2Y	3/4 x 120 to 3/4 x 240
N(A)YCWY, N(A)KBA	3/4 x 120 to 3/4 x 240

Joint Box Type	Cable-Ø max. (mm)	Dimensions (mm)			Joint Box Volume	Resin Net Weight	Kit Gross Weight
		a Ø	b	c			
VM 650	60	150	600	650	8740 cm <sup>3</sup>	10,03 kg	12,2 kg

## Handling

By few and simple mounting steps a fast and operator-safe assembly of the joint box is ensured.

By application of the quality management system in accordance with DIN EN ISO 9001:2000 the quality of our products is guaranteed.

## Application

The joint box is suitable for use with cable connectors.

## Specification

- two-part, transparent shell
- PUR and hardener in tins or alternatively in double-chamber bags
- sealing putty
- shell clips
- stirring spatula (for tins)
- emery cloth
- protection gloves
- installation instructions

## Quality

The joint box is system-tested according to VDE 0278 part of 1 and 3 respectively hp 623. Our cast resins fulfill the requirements of VDE 0291 part of 2 respectively hp 631.1.