


1 kV Straight Joints svm

2

for plastic insulated cables

heat shrink technique

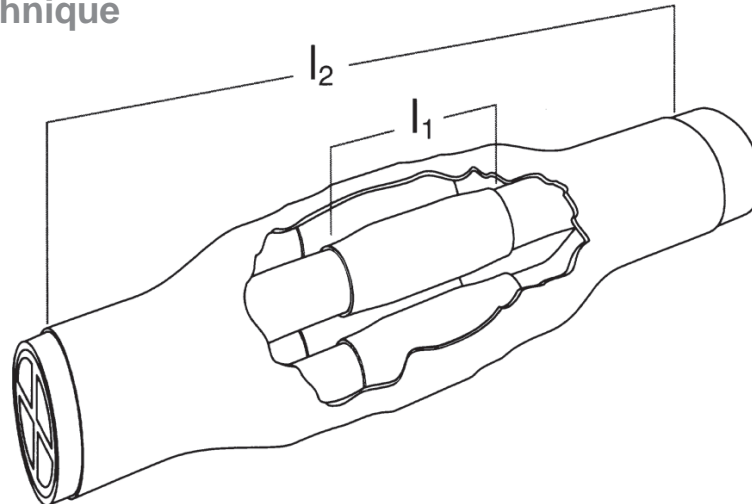

Cable Cross Section	Joint Type	Dimensions (mm)	
		l ₁ (inner)	l ₂ (outer)
4-core plastic cable			
1,5 – 16 mm ²	SVM 1,5-16 / 4	100	400
16 – 50 mm ²	SVM 16-50 / 4	150	600
25 – 95 mm ²	SVM 25-95 / 4	200	600
25 – 150 mm ²	SVM 25-150 / 4	250	700
95 – 300 mm ²	SVM 95-300 / 4	300	1000
4-core plastic cable for screw connectors			
6 – 35 mm ²	SVM 6-35 / 4-SV	120	400
25 – 70 mm ²	SVM 25-70 / 4-SV	150	550
70 – 150 mm ²	SVM 70-150 / 4-SV	230	700
5-core plastic cable			
1,5 – 6 mm ²	SVM 1,5-6 / 5	50	250
1,5 – 16 mm ²	SVM 1,5-16 / 5	100	400

Cables

e.g. N(A)YY, N(A)2X2Y, N(A)YCWY etc.
with PVC or PE/XLPE insulation.

Specification

- inner-tubes
- outer-tube
- installation instructions